

3875 Cypress Drive Petaluma, CA 94954 • 800.228.2555 • +1.707.773.1100 • Fax 707.773.1180 • www.gcx.com Mounting Solutions

VHM-P (Non-Locking) Variable Height Arm with 8"/20.3cm or 14"/35.6cm Extension and Philips Suspension Front End For Philips IntelliVue MP20/30/40/50/60/70, MX400/450/500/550/600/700/800 **Operation Guide**

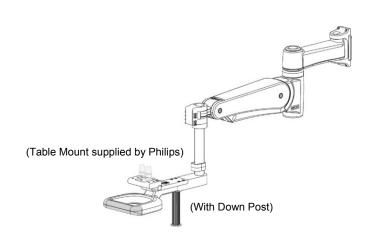

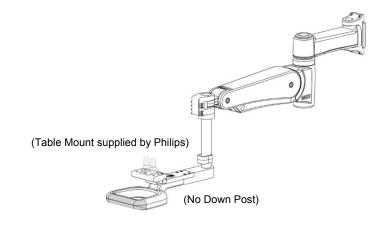

PH-0077-53 8"/20.3cm Extension PH-0077-54 14"/35.6cm Extension ☐ MX600/700/800

MP60/70


Load Range: 25 - 45 lb / 11.3 - 20.4 kg Maximum Tilt Weight Limit: 30 lb / 13.6 kg


I MP20/30/40/50 PH-0079-30 8"/20.3cm Extension PH-0079-31 14"/35.6cm Extension ☐ MX400/450/500/550



Load Range: 15 - 30 lb / 6.8 - 13.6 kg

Safety Label Locations (VHM-P Series Arms)







Refer to Installation Guide for additional information.



Remove the Device only when the Arm is at the highest position.



Do not remove device when arm is in a lowered position.




Potential pinch point that may cause personal injury.





Maximum weight for mounting plate with tilt function.








Counter Balance Load Range: 25 - 45 lb / 11.3 - 20.4 kg 15 - 30 lb / 6.8 - 13.6 kg

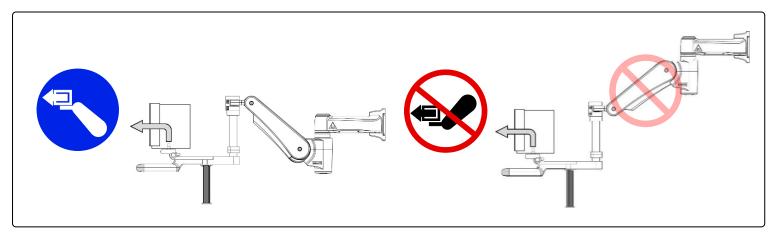


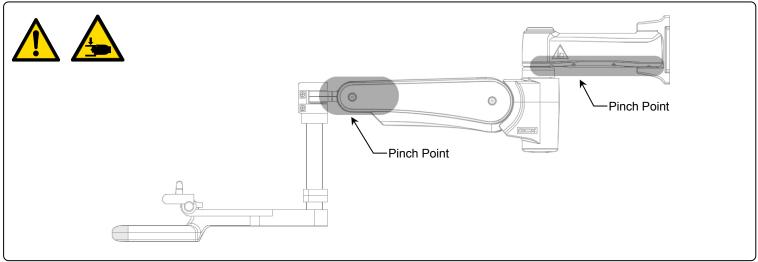

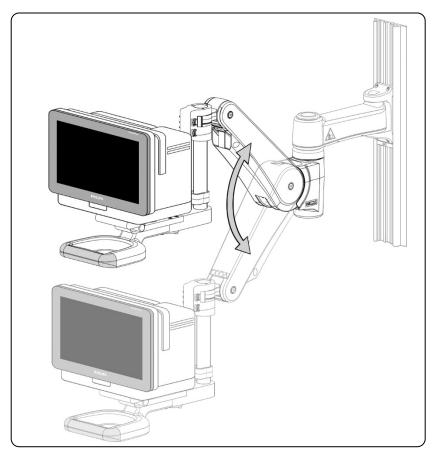

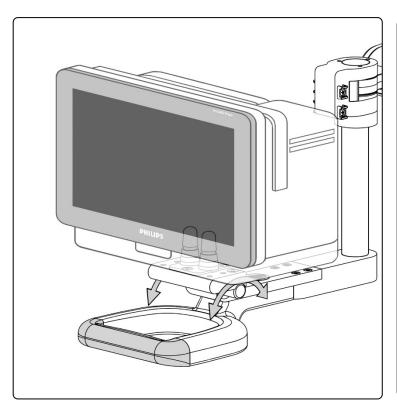

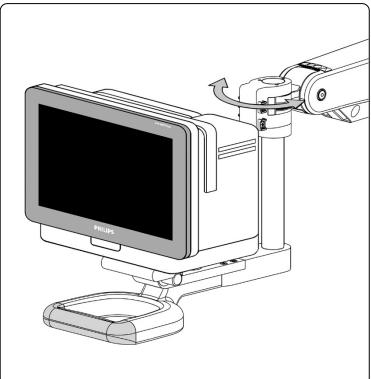

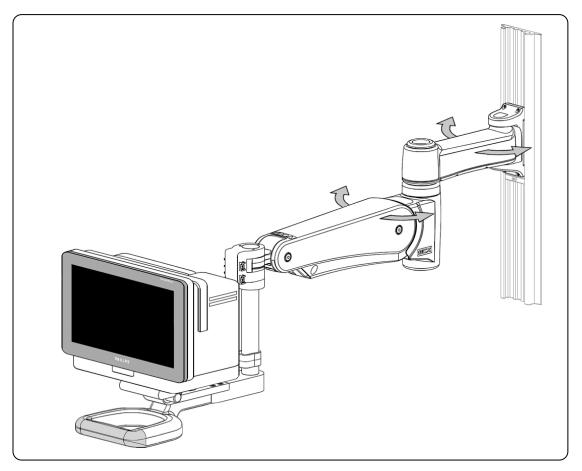



CAUTION: For MX600/7000/800- It is possible to position the device so there is potential for interference between the device and the Arm. Regardless of model number, ensure the device mounting locking mechanism is properly engaged at all times.