


## Installation Guide

### HP Ultra Slim flush CPU (75/100mm VESA)/power supply channel mount

The purpose of this guide is to:

1. Describe attachment of Slimline CPU (75/100mm VESA) and power supply to flush mount
2. Describe mounting of flush mount to GCX wall channel

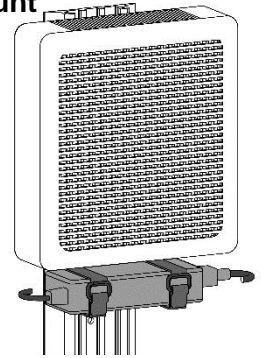


#### Parts Reference

The parts list below includes parts and hardware that will be used in this installation procedure (see photos for parts; hardware not shown). Note that this flush mount only accommodates small CPUs with the 75/100mm VESA pattern.



Item #	Description	Qty
1	Flush CPU/PS mount for GCX channel	1
2	M4 x 8mm Pan Head Machine Screw (PHMS)	4
3	Adjustable Channel stop	1

**Tools Required:** Phillips screwdriver (not supplied)

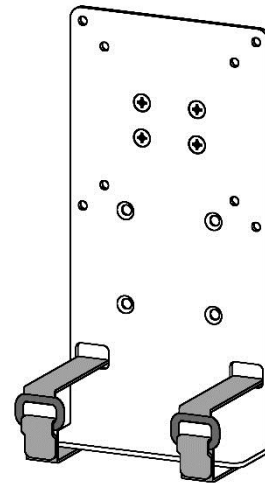


#### Attaching the CPU and power supply to the Flush Mount

1. Attach CPU to Flush Mount using the supplied M4 X 8mm PHMS, CPU can be mounted with connectors to left or right.
2. Place power supply in Velcro loops, pull straps tight and press firmly.

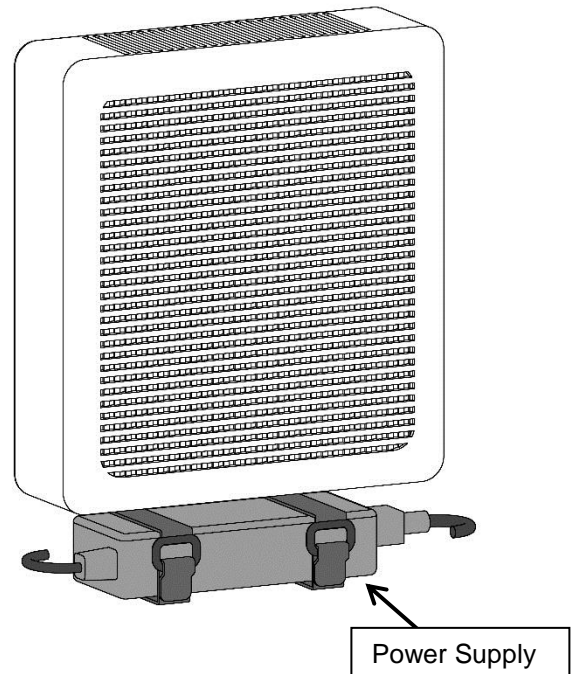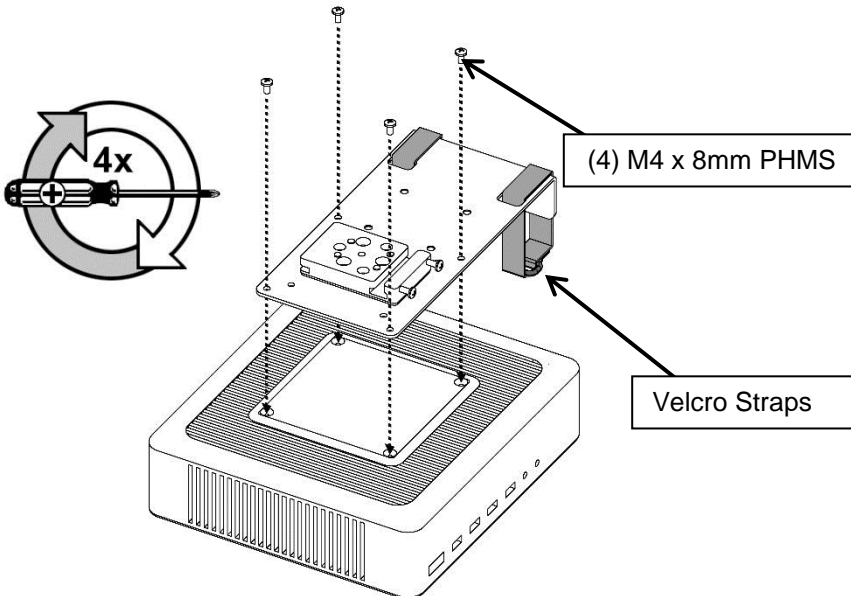


### Installing Flush Mount to GCX wall channel


1. Install Adjustable Stop in top of Channel, slide to desired mounting position and tighten center screw to secure.
2. Insert slide on flush mount into GCX channel, slide down to rest on adjustable stop as shown (below right)

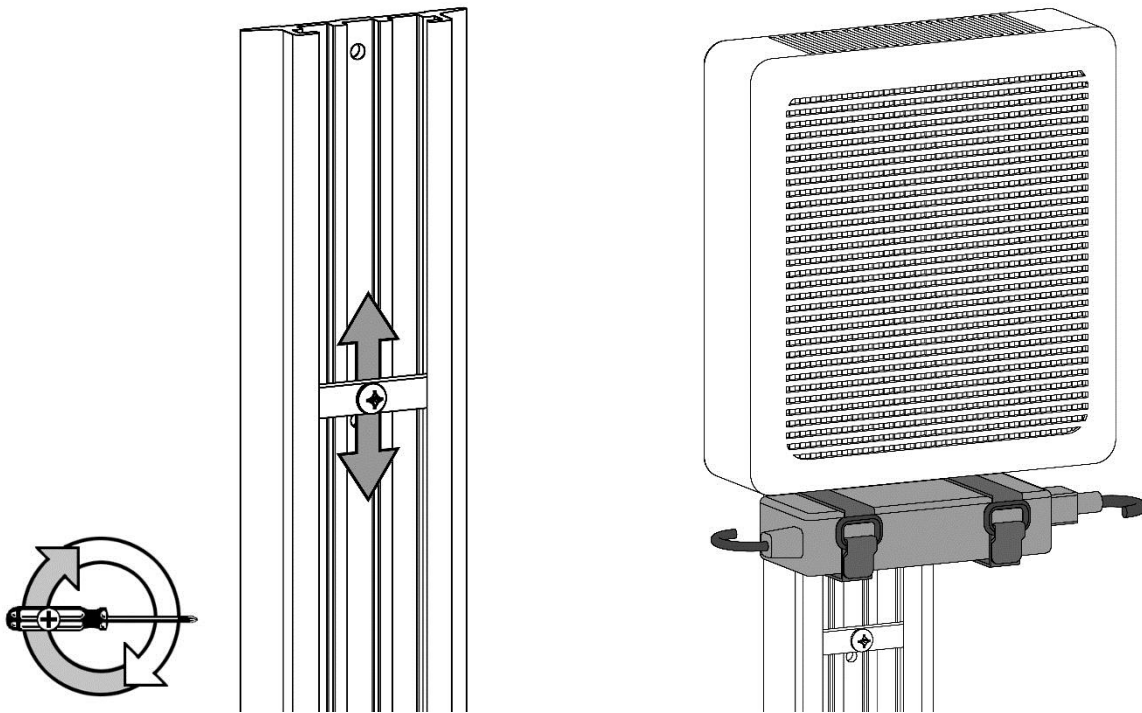

3. Using a Phillips screwdriver, tighten both screws on right side of mount to secure position.

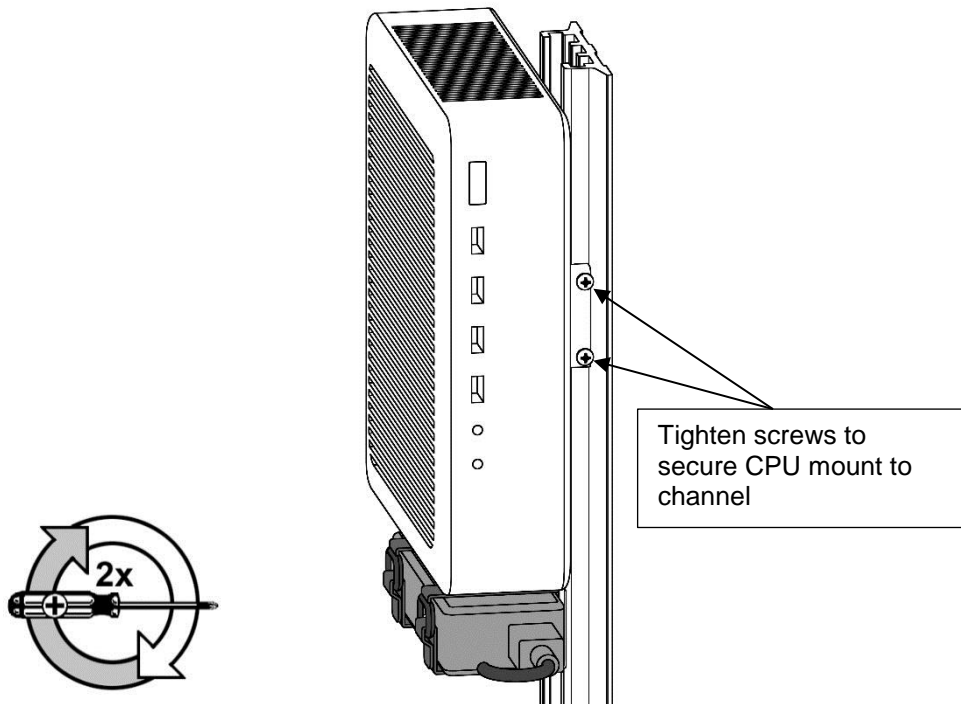

Assembled mount shown below. Route cables as needed

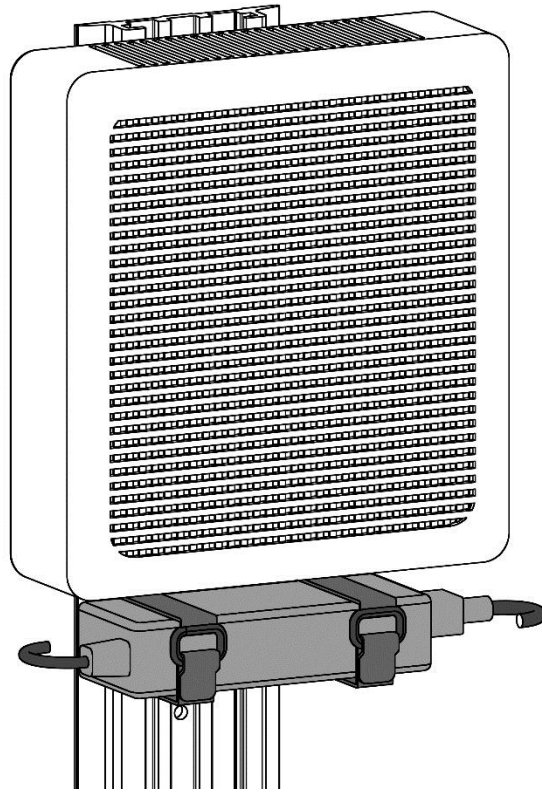

### **Routine Maintenance**

Periodically inspect all fasteners associated with the mounting system. Tighten or adjust fasteners as necessary for optimal operation and safety.

### **Cleaning the Mounting Assembly**

1. The mounting assembly may be cleaned with most mild, non-abrasive solutions commonly used in the hospital environment (e.g. diluted bleach, ammonia, or alcohol solutions).
2. The surface finish will be permanently damaged by strong chemicals and solvents such as acetone or trichloroethylene.
3. Do not use Steel wool or other abrasive material.
4. Damage caused by the use of unapproved substances or processes will not be warranted. It is recommended that you test any cleaning solution on a small area of the arm that is not visible to verify compatibility.
5. Never submerge or allow liquids to enter the mounting assembly. Wipe any cleaning agents off of the arm immediately, using water dampened cloth. Dry the assembly thoroughly after cleaning.

**CAUTION:** GCX makes no claims regarding the efficacy of the listed chemicals or processes as a means for controlling infection. Consult your hospital's infection control officer or epidemiologist. To clean or sterilize mounted devices or accessory equipment, refer to the specific instructions delivered with those products.