


Dual Channel Countertop Column



Sample Applications

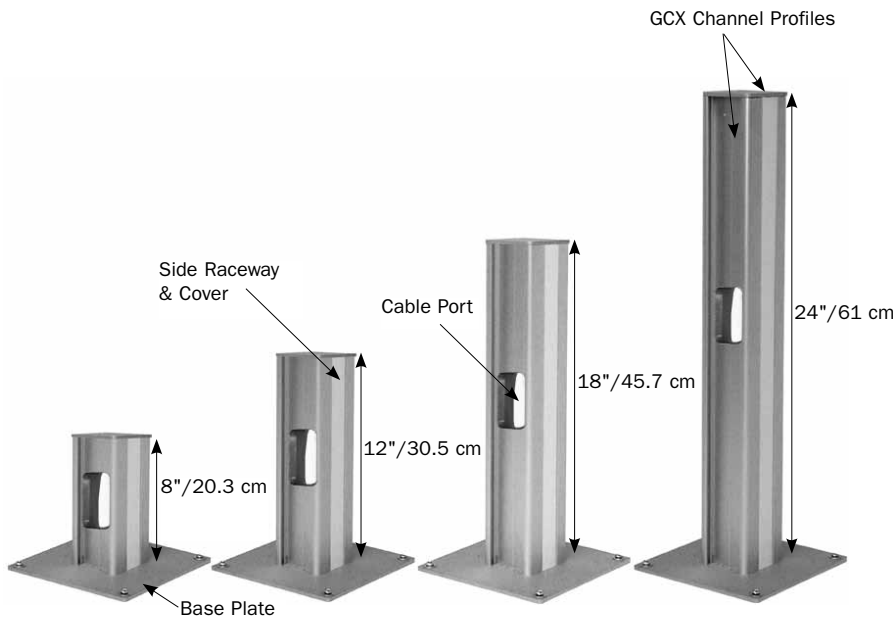

IT System using a GCTX VHM™ Variable Height Arm



PACS Viewing using a GCTX M-Series™ Arm



Philips IntelliVue MP90 System using a GCTX VHM Variable Height Arm



Spacelabs SL2800 System using a GCTX VHM Variable Height Arm

Dual Channel 8"/20.3 cm Counter Top Column QCT-0017-01

Dual Channel 12"/30.5 cm Counter Top Column QCT-0017-02

Dual Channel 18"/45.7 cm Counter Top Column QCT-0017-03

Dual Channel 24"/61 cm Counter Top Column QCT-0017-04

Dual Channel 36"/91.4 cm Counter Top Column QCT-0017-05

- Features two channel profiles to mount arms and accessories plus two side raceways with covers for cable management
- A pass-through access port in the channel profile area allows cable access from inside the column and to both sides
- Channel profiles can be positioned for left/right or front/back orientation to accommodate different arm combinations and application requirements
- 100 lbs/45.4 kg maximum load at channel profile (flush to column)
- 50 lbs/22.7 kg maximum load 24"/61 cm from the channel profile*
- 8"/20.3 cm x 8"/20.3 cm base plate plus an additional backing plate for secure installation

NOTE: Assumes adequate anchorage of column. Adequate anchorage is the responsibility of the purchaser



GCTX is an ISO 9001 registered company (TUV-Essen)

GCTX, VHRC, VHRS, VHM, PRC, M-Series, PolyMount and PolyQuip are trademarks of GCTX Corporation.

© Copyright 2010

MKT-0001-12 2/2010