

## GCX Mounting Assembly Installation Guide


### Dräger Fabius GS Rear Compartment Mounting Bracket

The purpose of this guide is to describe attachment of the Mounting Bracket to the bottom rear chassis of the Fabius GS.

#### Parts Reference

The following parts and hardware are included with this installation kit (see photo for parts; hardware not shown):


Item #	Description	Qty
1	Mounting Bracket	1
2	1/4-20 Kep Nut	2
3	1/4" Flat Washer	2
4	Velcro Strap, 48"	1
5	Fabius GS Channel, 12"	1
6	#10-32 x 3/8" Flat Head Machine Screw (FHMS)	4

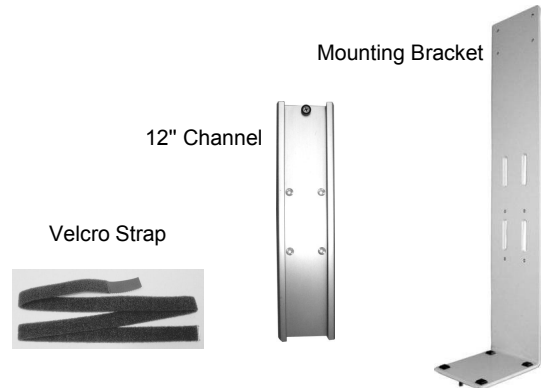

**Tools Required:** 7/16" wrench or nut driver, Phillips screwdriver.

**Installation Note:** Check the bottom rear chassis of the machine for mounting holes for the Mounting Bracket (see Pic 1). If mounting holes are not present, the Mounting Bracket cannot be attached at this time. Contact Dräger Customer Support for assistance.


If your machine has the required mounting holes, proceed to Step 1 on the next page.

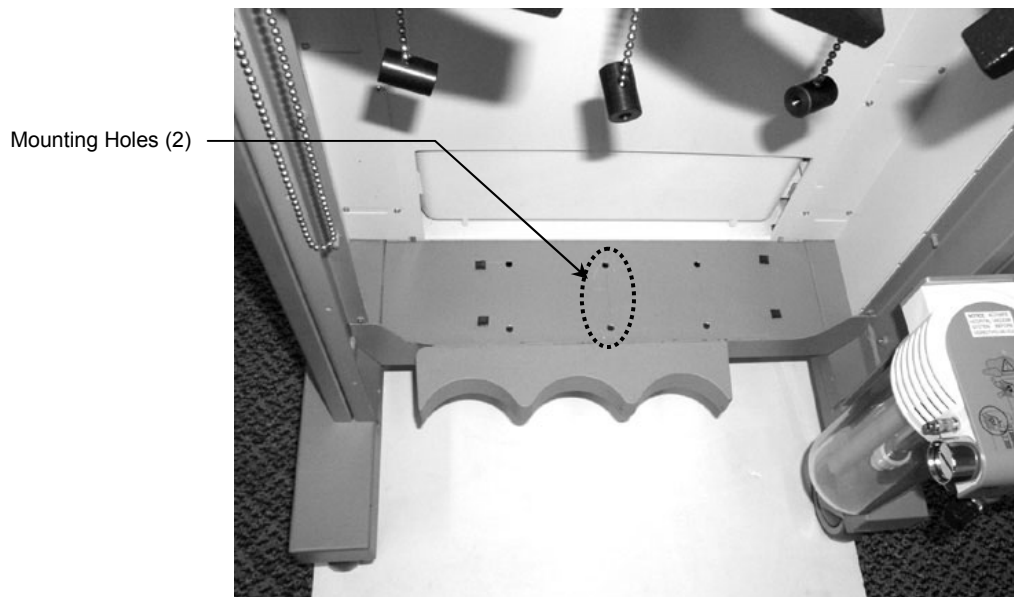

Pic 1


## Attaching the Mounting Bracket

1. Insert the Velcro Strap through the appropriate slots (upper or lower) in the Mounting Bracket (Pic 2).

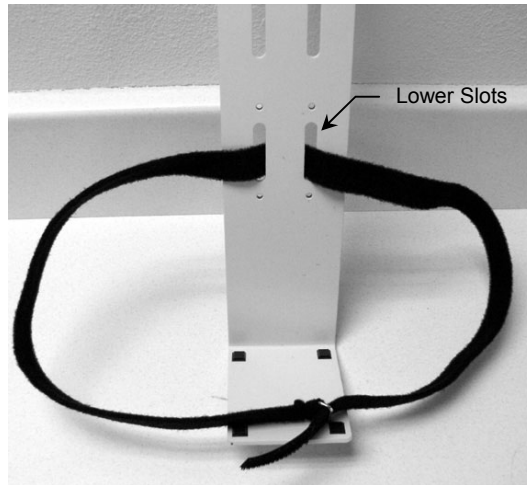


Pic 2

2. Insert the two (2) threaded studs (bottom of the Mounting Bracket) through the two (2) mounting holes in the chassis (see Pic 3). Using a 7/16" wrench, secure the Bracket to the chassis with the two (2) 1/4-20 kep nuts and 1/4" flat washers provided. Bracket should be attached as shown in Pic 4.

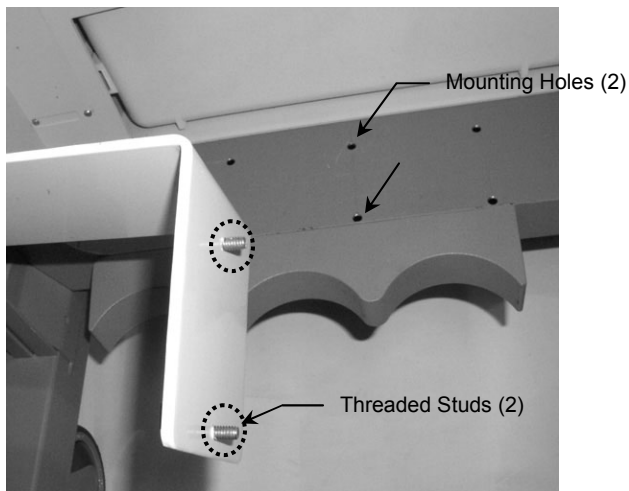

Pic 3

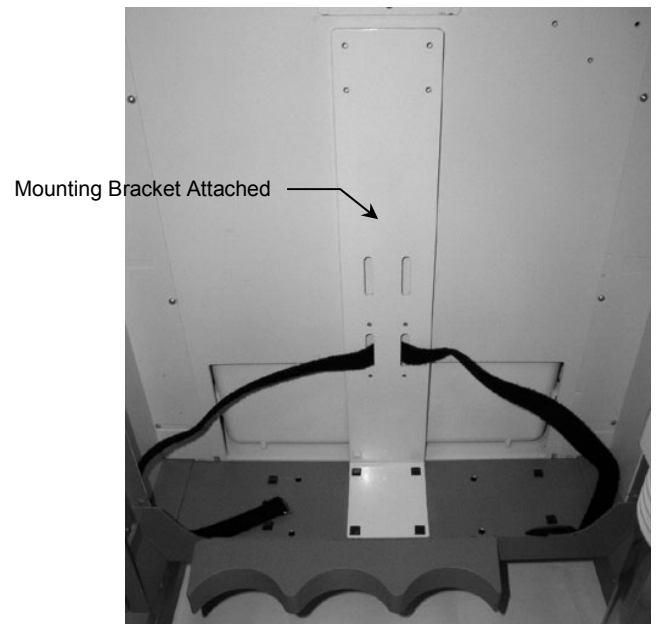


Pic 4

## Attaching the 12" Channel to the Mounting Bracket

A 12" Channel is provided for either vertical or horizontal attachment to the Mounting Bracket.

### Horizontal Attachment

1. Using four (4) #10-32 x 3/8" FHMS, attach the Channel to the four (4) threaded mounting holes at the top of the Mounting Bracket (see Pic 5).

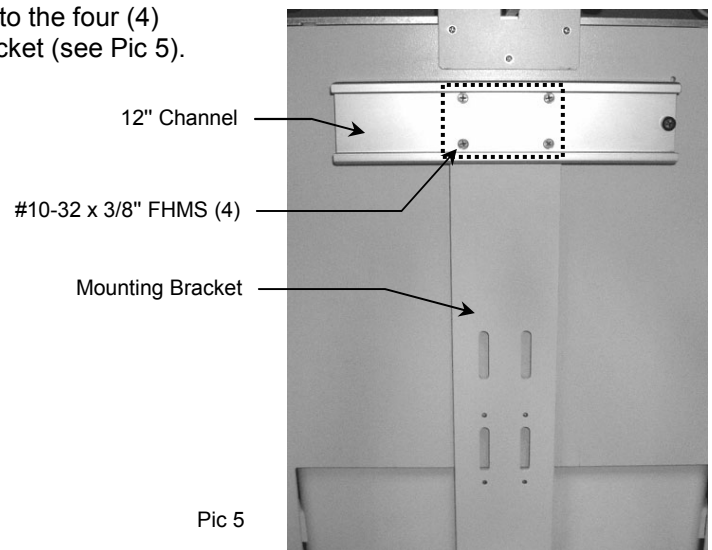

### Vertical Attachment

1. Remove the Velcro Strap from the Mounting Bracket.
2. Using four (4) #10-32 x 3/8" FHMS, attach the Channel to the four (4) threaded mounting holes above and below the lower slots in the Mounting Bracket (see Pic 6).

