


Installation Guide

Nihon Kohden CSM-1501/CSM-1502/BSM-6XXX/WEP-5200/GF-200 Series Mounting Adapter

The purpose of this guide is to describe installation of the Mounting adapter to the Monitor.

The following parts and are included with this kit:


Item	Description	Qty
1	Mounting Adapter	1
2	M4 x 8mm PHMS SEMS Split lock Washer	4

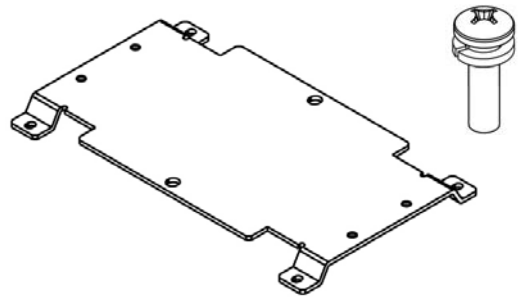


Tools Required: Phillips screwdriver (not provided)

Installing Mounting Adapter

Using a Phillips screwdriver, attach mounting adapter to the monitor with (4) M4 x 8mm PHMS as shown below.

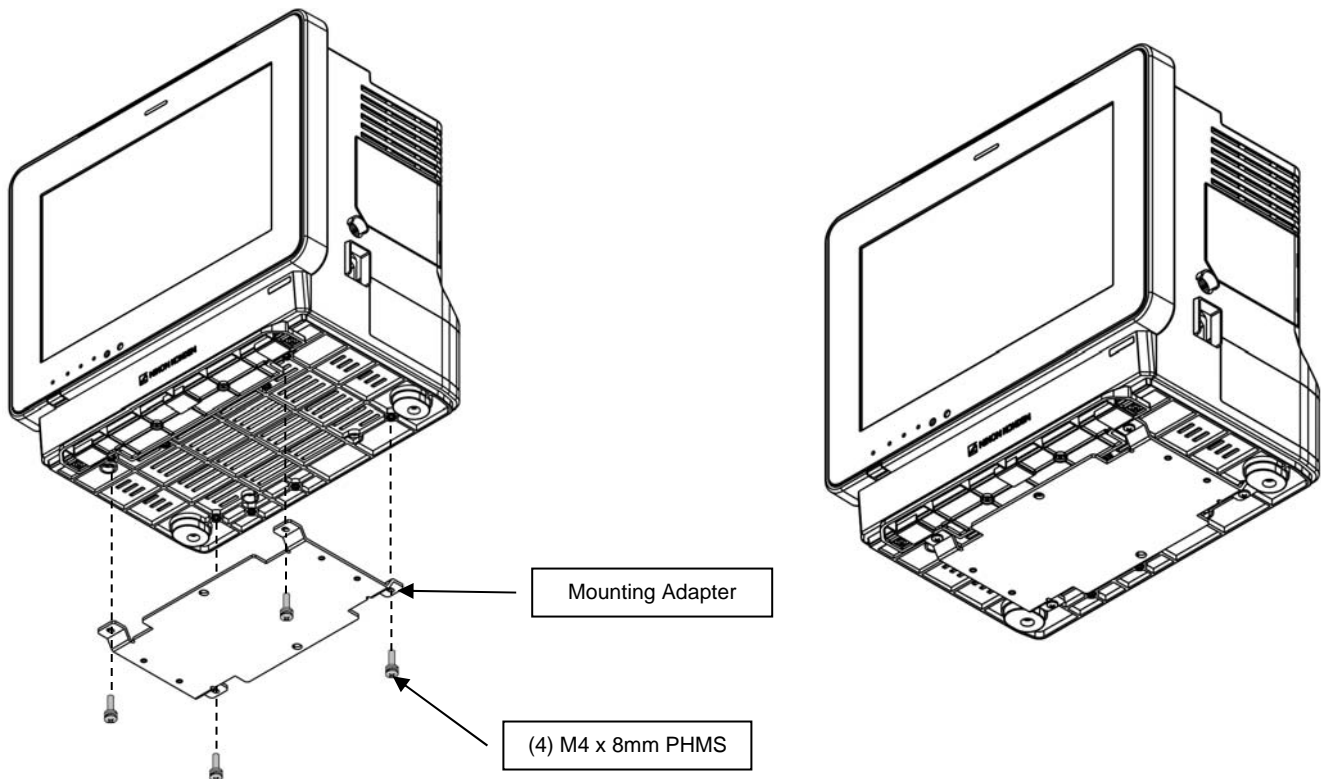

Installing Adapter on Slide-In Mounting Plate

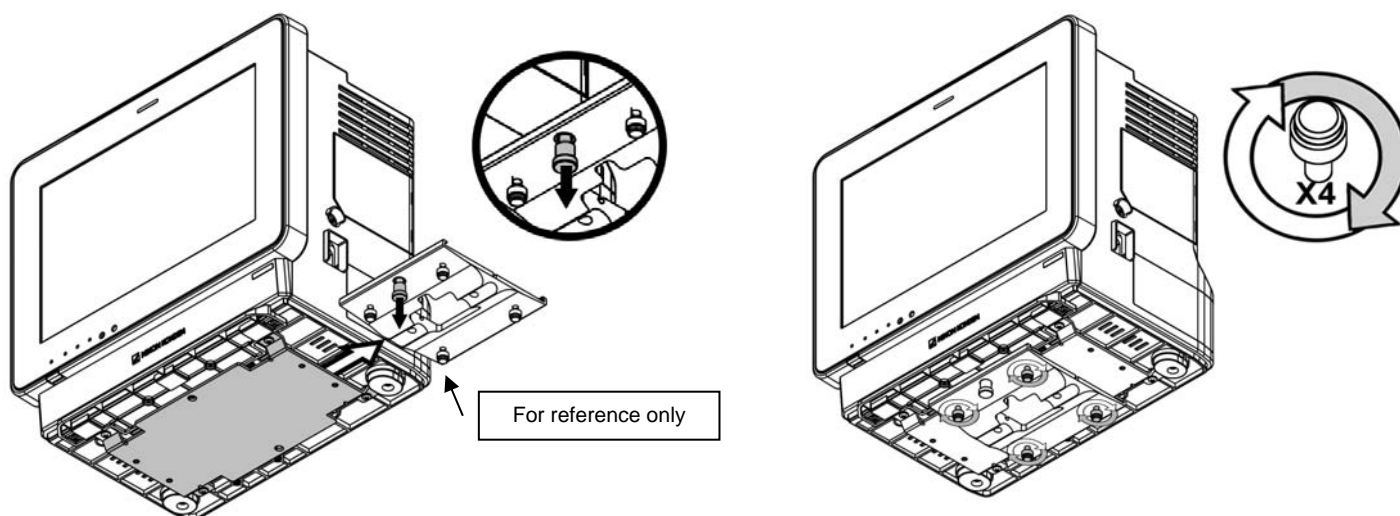

Routine Maintenance

Periodically inspect all fasteners associated with the mounting assembly. Tighten or Adjust as necessary for optimal operation and safety.

Cleaning the Mounting Assembly

The mounting assembly may be cleaned with most mild, non-abrasive solutions commonly used in the hospital environment (e.g. diluted bleach, ammonia, or alcohol solutions).

The surface finish will be permanently damaged by strong chemicals and solvents such as acetone or trichloroethylene.

Steel wool or other abrasive material should never be used.

Damaged caused by the use of unapproved substances or processes will not be warranted. We recommend testing of any cleaning solution on a small area of the mounting assembly that is not visible to verify compatibility.

Never submerge or allow liquids to enter the mounting assembly. Wipe any cleaning agents off the mounting assembly immediately using a water-dampened cloth. Dry the assembly thoroughly after cleaning.

CAUTION: GCX makes no claims regarding the efficacy of the listed chemicals or processes as a means for controlling infection. Consult your hospital's infection control officer or epidemiologist. To clean or sterilize mounted devices or accessory equipment, refer to the specific instructions delivered with those products.